



V300

VENTILATING AIR TREATMENT UNIT



A system without compromises

UVpro V300 ventilating air treatment units are ideal for subsequent installation and reliable treatment of any areas in the industrial food production, for halls and large waiting areas. Disinfects up to 300m³/h. With a corrosion-resistant reflector.

Easy installation, also subsequently

For production, ripening and storage rooms

Excellent price-performance ratio

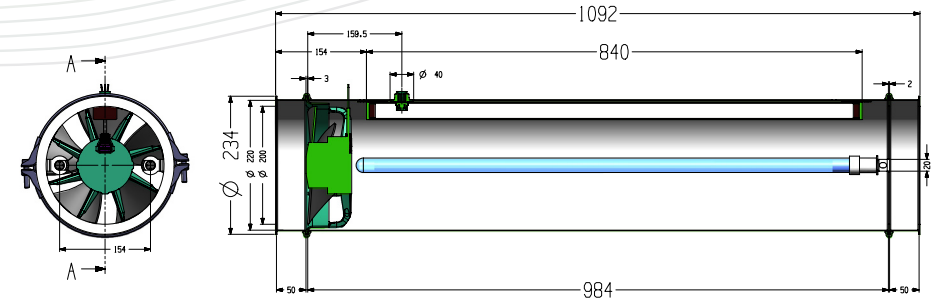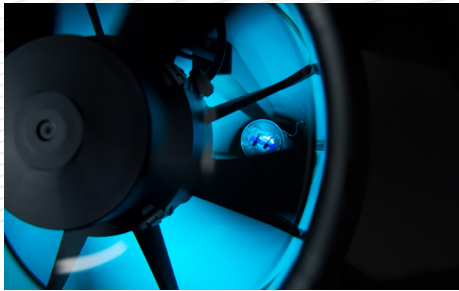

SPECIFICATIONS

Type	UVpro V300
In conformity with requirements	EMC, CE, IP54
Material	stainless steel: WN 1.4301 and WN 1.4305
Operating temperature [°C]	-10 to +40
Input power [W]	92
Current flow [mA]	395
Suitable UVpro lamp	UVpro K(T)40-4 (2 tubes à 41W)
Total UVC output [$W_{253,7\text{ nm}}$]	28
Air volume [m³/h]	250
Noise emission [dB]	34
Mount	2 eyelets for chain attachment
Size (L x Ø) [mm]	1092 x 234
Weight [kg]	13.8
Lamp replacement interval [h]	12,000 (75 %±5 % output performance)
Life expectancy electronics	> 10 years
Supply voltage [V_{AC}]	220-240 (50-60 Hz)
Power cable length [m]	5 (length customisable)

Application Optimised UV for



Food & Beverage
Industrial UV



Healthcare
Industrial UV



Pharmaceuticals
Industrial UV



Canada

+1 980.256.5700
americas@nuvonicuv.com

Mexico

+1 980.256.5700
americas@nuvonicuv.com

China

+86 21 61679599
apac@nuvonicuv.com

United Kingdom

+44 1753 515300
emea@nuvonicuv.com

Germany

+49 (0)2268 908300
germany@nuvonicuv.com

USA

+1 980 256 5700
americas@nuvonicuv.com

Malaysia

+60 16 440 8834
sea@nuvonicuv.com