



## V50

### *VENTILATING AIR TREATMENT UNIT*

#### **A system without compromises**

**UVpro V50** ventilating air treatment units are ideal for subsequent installation and reliable treatment in laboratories, doctor's offices and small production or storage rooms up to 50 m<sup>3</sup>. Suitable for wall- and ceiling installation. With power button.

---

**Easy installation, also subsequently**



---

**For laboratories, surgeries and small production facilities**

---

**Excellent price-performance ratio**

---

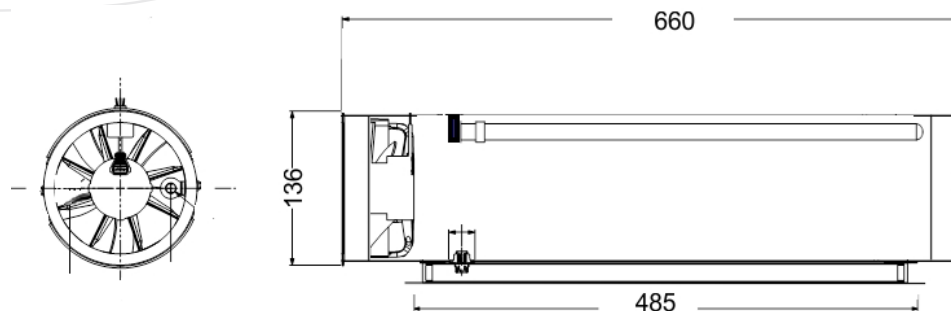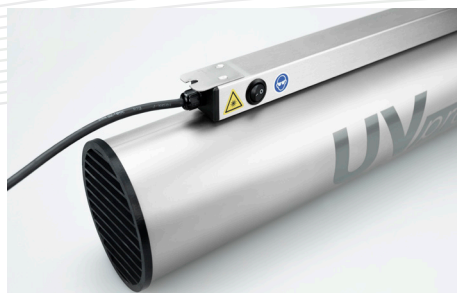

#### SPECIFICATIONS

Type	UVpro V50
In conformity with requirements	EMC, CE, IP54
Material	stainless steel: WN 1.4301 and WN 1.4305
Operating temperature [°C]	-10 to +40
Input power [W]	35
Current flow [mA]	220
Suitable UVpro lamp	UVpro KTS 20-4bl
Total UVC output [ $W_{253,7}$ nm]	8
Air volume [m³/h]	50
Noise emission [dB]	51
Mount	Wall and ceiling mounting
Size (L x Ø) [mm]	670 x 136 x 166
Weight [kg]	4
Lamp replacement interval [h]	12,000 (75 % <sup>+5</sup> % output performance)
Life expectancy electronics	> 10 years
Supply voltage [ $V_{AC}$ ]	220-240 (50-60 Hz)
Power cable length [m]	5 (length customisable)

#### Application Optimised UV for



Food & Beverage  
Industrial UV



Healthcare  
Industrial UV



Pharmaceuticals  
Industrial UV



#### Canada

+1 980.256.5700  
americas@nuvonicuv.com

#### Mexico

+1 980.256.5700  
americas@nuvonicuv.com

#### China

+86 21 61679599  
apac@nuvonicuv.com

#### United Kingdom

+44 1753 515300  
emea@nuvonicuv.com

#### Germany

+49 (0)2268 908300  
germany@nuvonicuv.com

#### USA

+1 980 256 5700  
americas@nuvonicuv.com

#### Malaysia

+60 16 440 8834  
sea@nuvonicuv.com